


Model: LEDHB-2L/EP/DM/100/ST-522 LEDHB-4L/PH/DM/160/ST-522




Specifications		
MODEL	LEDHB-2L/EP/DM/100/ST-522	LEDHB-4L/PH/DM/160/ST-522
WATTS	100W	160W
NOMINAL LUMENS	10350	17952
EFFIENCY (LPW)	103.5	112.2
CCT	5000K	5000K
CRI	Ra > 80	Ra > 80
POWER FACTOR	98	98
INPUT VOLTAGE	120-277V	120-277V
COVER MATERIAL	Clear Polycarbonate	Clear Polycarbonate
L80	>50, 000	>50, 000

Model: LEDHB-4L/IN/DM/240/ST-544 LEDHB-6L/PH/DM/300/ST-544

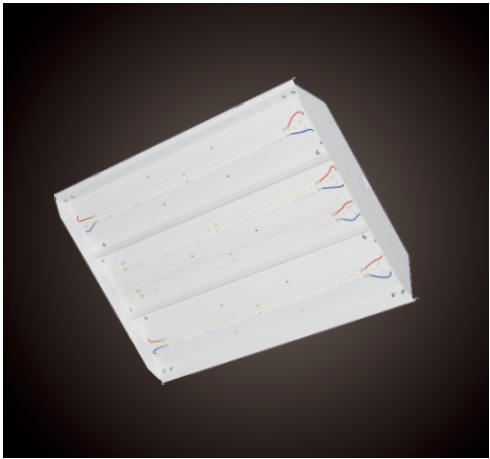


Specifications		
MODEL	LEDHB-4L/IN/DM/240/ST-544	LEDHB-6L/PH/DM/300/ST-544
WATTS	240W	300W
NOMINAL LUMENS	27720	36570
EFFIENCY (LPW)	115. 5	121. 9
CCT	5000K	5000K
CRI	Ra > 80	Ra > 80
POWER FACTOR	98	98
INPUT VOLTAGE	120-277V	120-277V
COVER MATERIAL	Clear Polycarbonate	Clear Polycarbonate
L80	>50, 000	>50, 000

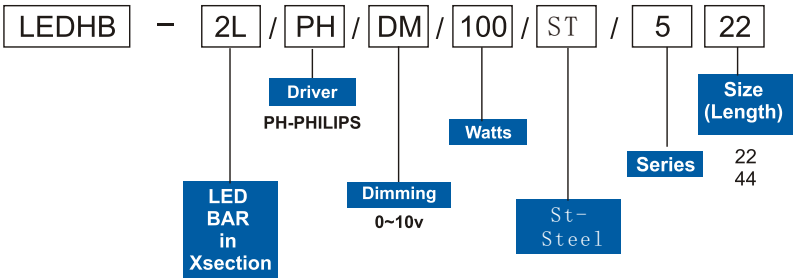

Example:
LEDHB-2L/PH/DM/100/AL-522




INSTALLATION

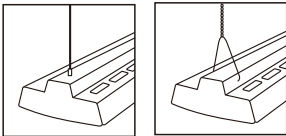

Quick Cable Chain Mount





Acrylic lens
Variety of acrylic lens selection
White frame fixation

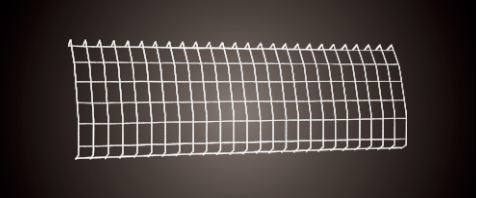

Wire guard
White color, independently used
or together with other accessories



Anti glare options
Open type
Has the largest optical output

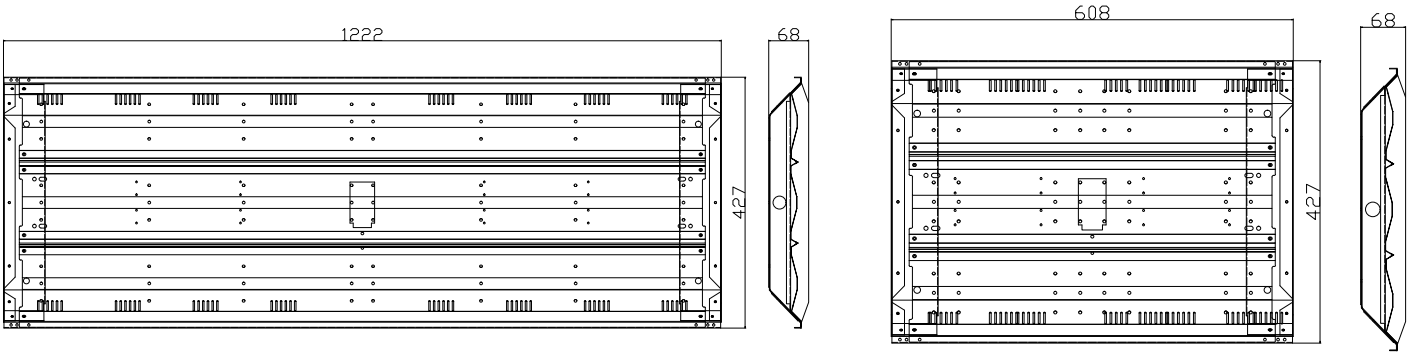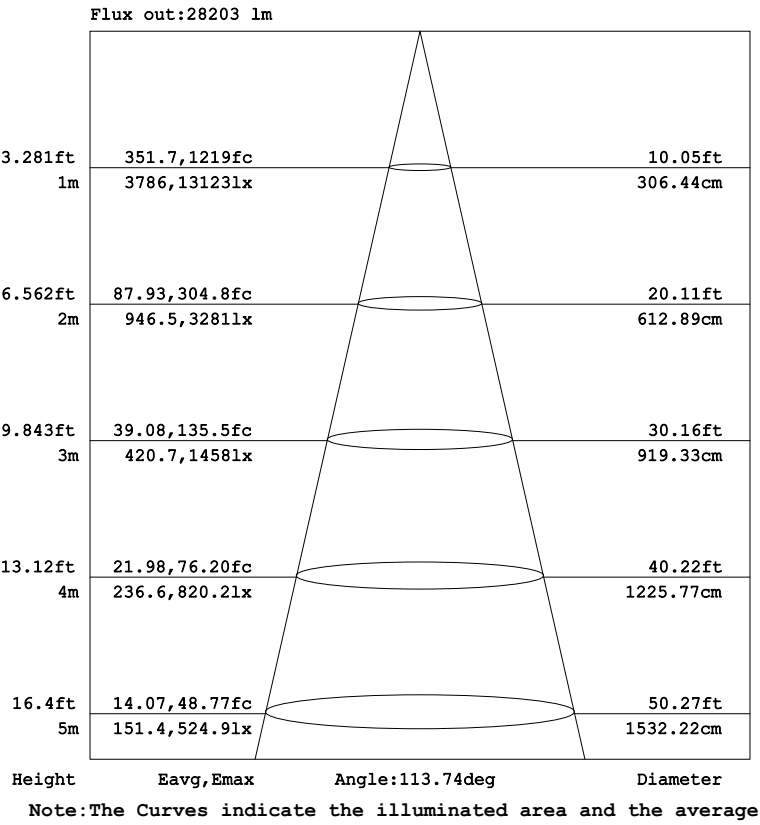

MODEL	NOMINAL LENGTH		NOMINAL WIDTH		NOMINAL HEIGHT	
LEDHB-2L/EP/DM/100/ST-522	608mm	24"	427mm	16 7/8"	68mm	2 6/7"
LEDHB-4L/PH/DM/160/ST-522	608mm	24"	427mm	16 7/8"	68mm	2 6/7"
LEDHB-4L/IN/DM/240/ST-544	1222mm	48"	427mm	16 7/8"	68mm	2 6/7"
LEDHB-6L/PH/DM/300/ST-544	1222mm	48"	427mm	16 7/8"	68mm	2 6/7"