




LED HIGHBAY-LEDHB7/AL Series

The HOSSONI LEDHB7/AL High Bay LED fixture is the best of our LED technologies and our most popular high bay product. The result is a high-performance, quality, configurable LED luminaire. LEDHB7/AL is an ideal one-for-one replacement of conventional high bay system such as HID and fluorescent. LEDHB7/AL LED High Bay fixture use pure aluminum housing ,ideal for large indoor spaces, including warehouses, gymnasiums and distribution centers that require mounting heights from 15 to 50 feet, ambient temperatures up to 131°C F (55°C)

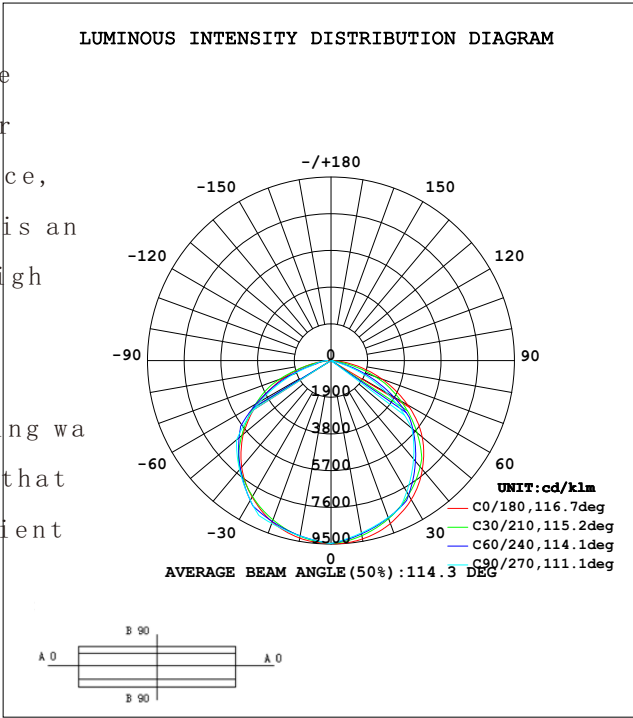

Model: LEDHB-2L/EP/DM/100/AL-722 LEDHB-3L/PH/DM/150/AL-722 LEDHB-4L/PH/DM/200/AL-722




Specifications			
MODEL	LEDHB-2L/EP/DM/100/AL-722	LEDHB-3L/PH/DM/150/AL-722	LEDHB-4L/PH/DM/200/AL-722
WATTS	100W	150W	200W
NOMINAL LUMENS	10330	15480	20560
EFFIENCY (LPW)	103.3	103.2	102.8
CCT	5000K	5000K	5000K
CRI	Ra > 80	Ra > 80	Ra > 80
POWER FACTOR	98	98	98
INPUT VOLTAGE	120-277V	120-277V	120-277V
COVER MATERIAL	Clear Polycarbonate	Clear Polycarbonate	Clear Polycarbonate
L80	>50,000	>50,000	>50,000

Model: LEDHB-2L/PH/DM/160/AL-744 LEDHB-3L/PH/DM/210/AL-744 LEDHB-4L/PH/DM/300/AL-744



Specifications			
MODEL	LEDHB-2L/PH/DM/160/AL-744	LEDHB-3L/PH/DM/210/AL-744	LEDHB-4L/PH/DM/300/AL-744
WATTS	160W	210W	300W
NOMINAL LUMENS	18272	23898	34230
EFFIENCY (LPW)	114.2	113.8	114.1
CCT	5000K	5000K	5000K
CRI	Ra > 80	Ra > 80	Ra > 80
POWER FACTOR	98	98	98
INPUT VOLTAGE	120-277V	120-277V	120-277V
COVER MATERIAL	Clear Polycarbonate	Clear Polycarbonate	Clear Polycarbonate
L80	>50,000	>50,000	>50,000

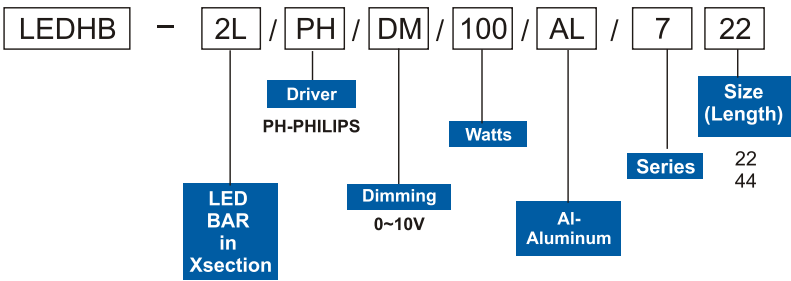

Example:
LEDHB-2L/PH/DM/100/AL-722



INSTALLATION

